



{Portable}

HSE Series

Electric - Belt Drive


For the ultimate in electric, hot water pressure washers, opt for this belt drive unit that offers larger volume capacity and quiet operation.



HSE-3504-0M10

Additional Features:

- ✓ Totally enclosed fan-cooled electric motor with manual thermal overload protection
- ✓ Belt drive triplex piston General pump with ceramic plungers and forged brass manifold
- ✓ Thermal relief valve
- ✓ Stainless-steel and brass unloader valve
- ✓ 35-foot power cord (ground fault circuit interrupter GFCI on HSE-2504-0M10)
- ✓ High pressure detergent injection
- ✓ Complete system diagnostic board
- ✓ Solid state electronic ignition
- ✓ Float tank
- ✓ Pressure and high limit safety controls
- ✓ No. 1 or No. 2 diesel or kerosene fired burner
- ✓ Polyethylene burner fuel tank
- ✓ Temperature rise 150°F/66°C above ambient, maximum outlet temperature is 200°F
- ✓ Electric cord hanger
- ✓ Powder coated steel hose reel mounting bracket
- ✓ Powder coated steel gun/wand holder
- ✓ Solid steel threaded axles
- ✓ Pneumatic tires with tubes (4)
- ✓ Locking tire brake
- ✓ 50-foot x 3/8-inch steel wire-braided pressure hose with screw connects, swivel and bend restrictors
- ✓ Professional-grade insulated trigger gun with safety lock-off
- ✓ Adjustable pressure insulated dual lance with 15-degree fixed and detergent nozzle

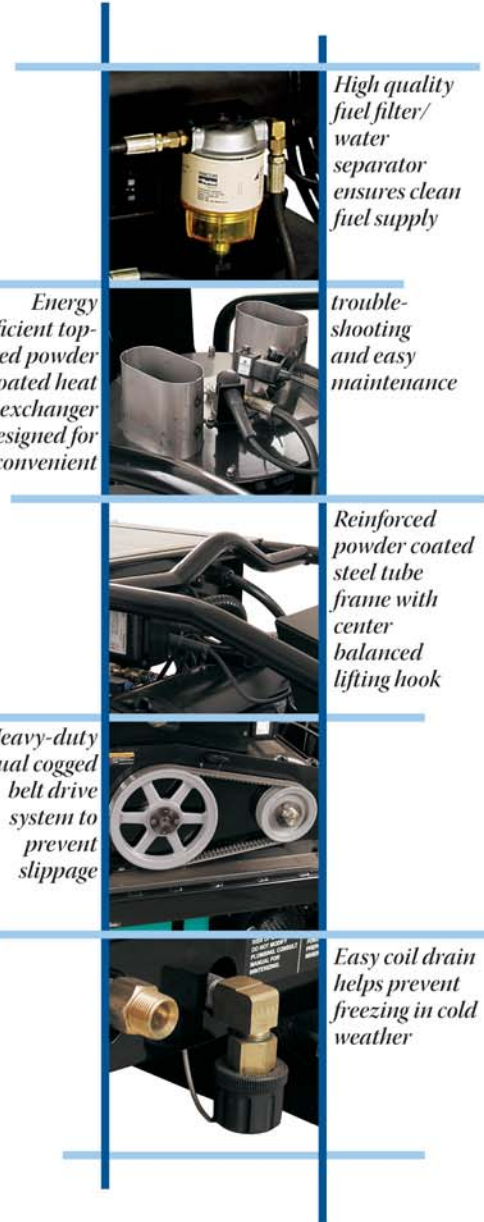

High quality fuel filter/ water separator ensures clean fuel supply

Energy efficient top-fired powder coated heat exchanger designed for convenient

trouble-shooting and easy maintenance

Reinforced powder coated steel tube frame with center balanced lifting hook

Heavy-duty dual cogged belt drive system to prevent slippage

Easy coil drain helps prevent freezing in cold weather



Specifications:

Model #	HSE-2504-0M10	HSE-2504-0M30	HSE-3004-0M10	HSE-3004-0M30	HSE-3504-0M10	HSE-3504-0M30
Pressure (psi)	2500	2500	3000	3000	3500	3500
Flow (gpm)	3.2	3.2	3.5	3.5	3.3	3.3
Motor	230V, 1Ø, 25.0A	230-460V, 3Ø, 16.0A	230V, 1Ø, 36.0A	230-460V, 3Ø, 24.0A	230V, 1Ø, 39.0A	230-460V, 3Ø, 28.0A
Horsepower	6.0	6.0	8.0	8.0	10.0	10.0
Plug type	NEMA L6-30P	NEMA L15-20P	NEMA 6-50P	NEMA L15-30P	NEMA 6-50P	NEMA L15-30P
Burner fuel tank cap.	10.0 gallon	10.0 gallon	10.0 gallon	10.0 gallon	10.0 gallon	10.0 gallon
Burner fuel cons.	2.10 gph	2.10 gph	2.10 gph	2.10 gph	2.10 gph	2.10 gph
Dim. (LxWxH)	49.5in.x28in.x40.5in.	49.5in.x28in.x40.5in.	49.5in.x28in.x40.5in.	49.5in.x28in.x40.5in.	49.5in.x28in.x40.5in.	49.5in.x28in.x40.5in.
Shipping weight	699 lbs.	688 lbs.	737 lbs.	732 lbs.	761 lbs.	742 lbs.
Net weight	569 lbs.	558 lbs.	607 lbs.	602 lbs.	631 lbs.	612 lbs.



NEMA L15-20P,
20-amp plug



NEMA L15-30P,
30-amp plug



NEMA L6-30P,
30-amp plug



NEMA 6-50P,
50-amp plug



HSE-3004-0M10

**2111 Catalina
Pasadena, TX 77503
281-479-5966 800-458-6304
www.alklean.com**

Options:

- HX-0070** **Auto start/stop** - When trigger gun is released, the timer will turn unit off; when trigger gun is pulled unit will restart
- HX-0071 - HX-0073** **Auto start/stop-steam** - Auto start/stop option - When trigger gun is released, the timer will turn unit off; when trigger gun is pulled unit will restart; **Steam option** - reduces pressure to 350-PSI by adjusting unloader valve counter-clockwise, spray temperatures will rise 240°F over ambient with a maximum of 300°F
- HX-0074** **Auto start/stop-CAD cell** - Auto start/stop option - When trigger gun is released, the timer will turn unit off; when trigger gun is pulled unit will restart; **CAD cell option** monitors burner for proper ignition
- HX-0075 - HX-0077** **Auto start/stop-steam/CAD cell** - Auto start/stop option - When trigger gun is released, the timer will turn unit off; when trigger gun is pulled unit will restart; **Steam option** - reduces pressure to 350-PSI by adjusting unloader valve counter-clockwise, spray temperatures will rise 240°F over ambient with a maximum of 300°F; **CAD cell option** monitors burner for proper ignition
- HX-0085 - HX-0087** **460V** - Upgrade 230V three-phase units to operate at 460V three-phase
- HX-0088** **Skid feet** - Stationary applications
- HX-0161** **Hour meter** - Displays number of hours unit has been in operation
- TX-1304-W** **Puncture-proof tires** - Tires are flat-free, maintenance-free and non-marking, 13-inch, white hub, four tires

Model #	HX-0070	HX-0071	HX-0072
HSE-2504-0M10	●	●	
HSE-2504-0M30	●	●	
HSE-3004-0M10	●		●
HSE-3004-0M30	●		●
HSE-3504-0M10	●		
HSE-3504-0M30	●		

Model #	HX-0073	HX-0074	HX-0075	HX-0076	HX-0077	HX-0085	HX-0086	HX-0087	HX-0088	HX-0161	TX-1304-W
HSE-2504-0M10		●	●						●	●	●
HSE-2504-0M30		●	●			●			●	●	●
HSE-3004-0M10		●		●					●	●	●
HSE-3004-0M30		●		●			●		●	●	●
HSE-3504-0M10	●	●			●				●	●	●
HSE-3504-0M30	●	●			●			●	●	●	●