



BX/BXA Series

Cold Water Pressure Washers

#1 in North America for High-Pressure Cleaning Equipment

Gasoline / Belt Drive

Five, high-pressure stainless steel nozzles: 0°, 15°, 25°, 40° and detergent nozzle

100' Hose Reel Kit (optional) keeps hose of up to 4000 PSI, safely stored and out of the way (shown with reel & mounting hardware)

Reliable **Honda GX** gasoline engine



Hotsy pumps carry an 7-year warranty

All-steel frame with powder coat paint with front and rear handles for easier lifting

High-pressure relief valve protects the machine and user

Totally enclosed **OSHA-compliant belt guard** reduces noise and vibration

Heavy-duty **inlet water filter** with removable screen for easy cleaning

The BX-373539 features a **large chassis frame** (shown left) with 13" pneumatic tires for easy handling

Trigger gun control and high-pressure wand with ergonomic, adjustable side handle

Downstream detergent injection allows remote detergent injection

All BX/BXA Series models are equipped with **50-ft. high pressure hose**

FEATURES

- 2.8 to 3.7 GPM / 2000 to 3500 PSI
- Honda GX Gasoline Engine
- Available in small and large chassis frame
- Available in aluminum chassis frame
- ETL-Certified to UL-1776 safety standards

The BXA models feature a **compact aluminum chassis frame** (shown at right) with 10" pneumatic tires



www.Hotsy.com

Nothing Cleans Like a Hotsy!

BX / BXA SERIES Cold Water GASOLINE Models

■ Honda GX gas engines ■ 2.8 to 3.7 GPM @ 2000 to 3500 PSI ■ Aluminum, large or small chassis frames ■ Recoil start

The Hotsy BX / BXA Series: The Right Choice for Tough, Cold-Water Cleaning

SPECIFICATIONS

BELT DRIVE

MODEL	GPM	PSI	ENGINE / MODEL	CC's	START	PUMP MODEL	DIMENSIONS	FRAME	HOSE	SHIP WT (lbs)
BX-282039	2.8	2000	Honda GX160	163	RECOIL	HD3030R.1	37"Lx21"Wx24"H	Small Chassis	50'	152
BX-373539	3.7	3500	Honda GX390	389	RECOIL	HM4035R.2	45"Lx26"Wx24"H	Large Chassis	50'	261
BXA-252739	2.5	2700	Honda GX200	196	RECOIL	HD3030R.1	45.9"Lx26"Wx39.7"H	Aluminum	50'	196
BXA-373539	3.7	3500	Honda GX390	389	RECOIL	HM4035R.3	45.9"Lx27"Wx40.6"H	Aluminum	50'	249



Clean better with Hotsy detergents

Hotsy pressure washers and parts washers clean best when matched with specially formulated Hotsy detergents. More than 40 liquids and powders meet every cleaning need imaginable. Nearly all contain Hotsy's exclusive advanced-formula HCC additives to help prevent scale build-up and to fight corrosion in your equipment. Most Hotsy detergents are USDA and Canadian Agriculture approved. All are highly concentrated, so a little goes a long way.

Looking to save time and money? See a Hotsy foamer in action!



Spend some time with a Hotsy Expert

Hotsy has more than 160 local distributors in North America, all factory-trained to properly evaluate your high-pressure cleaning needs.

Over 80% of Hotsy's distributors have been supporting Hotsy systems for more than 20 years.



Rely on our network of seasoned service professionals for the safest, most effective and most efficient solution to your specific cleaning need.

OPTIONS (BX Models Only)

- Large or small chassis 100' E-Zee Hose Reel Kit*
* Kit includes hose reel and mounting hardware

Hotsy Accessories customize your application for top performance

Telescoping wands extend to 24' to reach high places without scaffolding




High-pressure turbo nozzles for faster cleaning

Hose reels help protect your high-pressure hose



Heavy-duty high-pressure hoses in lengths up to 150-ft.

Rotary surface cleaner attaches to your pressure washer; reduces overspray and zebra striping

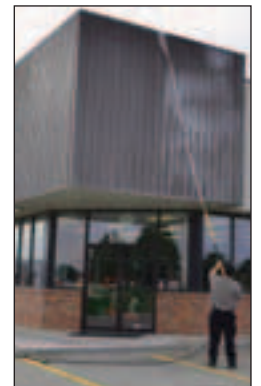

Distributed by:

Alklean Industries Inc
2111 Catalina
Pasadena, TX 77503
ph 281-479-5966
ph 800-458-6304
www.alklean.com



Tel: (800) 525-1976 Fax: (888) 880-9631
www.Hotsy.com email: info@Hotsy.com
P/N 8.914-198.0 Effective 8/12 Specifications & product descriptions subject to change without notice. ©2012 Hotsy
A member of KÄRCHER North America

NOTE: We are constantly improving and updating our products. Consequently, pictures, features & specifications in this brochure may differ slightly from current models. Flow rates & pressure ratings may vary due to variances allowed by manufacturers of our machine components. We attempt to keep our machine performance within ± 5% of listed specifications.