

HDD & HDB Specifications

Model No.	PSI	GPM	Displacement or HP/Engine	Engine Fuel Tank Cap.	Burner Fuel Tank Cap.	Fuel Consumption	Dimensions (LxWxH)	BTU	Ship Wt.	Net Wt.
HDD-3504-OH6A	3500	3.3	389cc Honda OHV	1.7 gallon	10.0 gallon	2.76 gph	53.5in.x28.75in.x42in.	386,400	652 lbs.	533 lbs.
HDD-3804-OV6A	3800	4.8	480cc Vanguard OHV	10.0 gallon	10.0 gallon	2.76 gph	53.5in.x28.75in.x42in.	386,400	677 lbs.	558 lbs.

POWERED by **HONDA**

Model No.	PSI	GPM	Displacement or HP/Engine	Engine Fuel Tank Cap.	Burner Fuel Tank Cap.	Fuel Consumption	Dimensions (LxWxH)	BTU	Ship Wt.	Net Wt.
HDB-2805-OY6G	2800	4.5	9.2 HP Yanmar	10.0 gallon	10.0 gallon	3.37 gph	53.5in.x28.75in.x42in.	471,800	745 lbs.	626 lbs.
HDB-3005-OV6G	3000	4.8	480cc Vanguard OHV	10.0 gallon	10.0 gallon	3.37 gph	53.5in.x28.75in.x42in.	471,800	720 lbs.	601 lbs.
HDB-3005-OK6G	3000	4.8	480cc Vanguard OHV	10.0 gallon	10.0 gallon	3.37 gph	53.5in.x28.75in.x42in.	471,800	736 lbs.	617 lbs.

Options

50-0170	Stack adapter - Allows 8-inch flue pipe to be installed to boiler exhaust port
850-0324	Gasket (for 50-0170) - Seals between 50-0170 stack adapter and boiler housing
AW-5740-0014	Wheel kit - Allows unit to become portable - (4) 13-inch wheels with brake and handle
HX-0130	Three-way ball valve - Allows pressure washer to be operated from garden hose/float tank or trailer supply tank by adjusting ball valve lever
HX-0156	Hour meter - Displays number of hours unit has been in operation
HX-0172	250°F Steam - Increases outlet temperature to 250F, #3 nozzle
HX-0176	250°F Steam - Increases outlet temperature to 250F, #4 nozzle
HX-0220	High pressure chemical, including float tank (K7)
HX-0221	High pressure chemical, including float tank (trapping unloader)
HX-0222	Panel engine key switch - Moves engine key switch from engine to front panel
HX-0224	Steam - Increases outlet temperature to 250°F
HX-0225	Trapping unloader - For longer hose runs and cleaning elevated areas


Model #	50-0170	850-0324	AW-5740-0014	HX-0130	HX-0156	HX-0172	HX-0176	HX-0220	HX-0221	HX-0222	HX-0224	HX-0225
HDD-3504-OH6A	•	•	•	•	•	•	•	•	•	•	•	•
HDD-3804-OV6A	•	•	•	•	•	•	•	•	•	•	•	•
HDB-2805-OY6G	•	•	•	•	•	•	•	•	•	•	•	•
HDB-3005-OV6G	•	•	•	•	•	•	•	•	•	•	•	•
HDB-3005-OK6G	•	•	•	•	•	•	•	•	•	•	•	•



Hot Water Pressure Washers

HDD Series

HDB Series

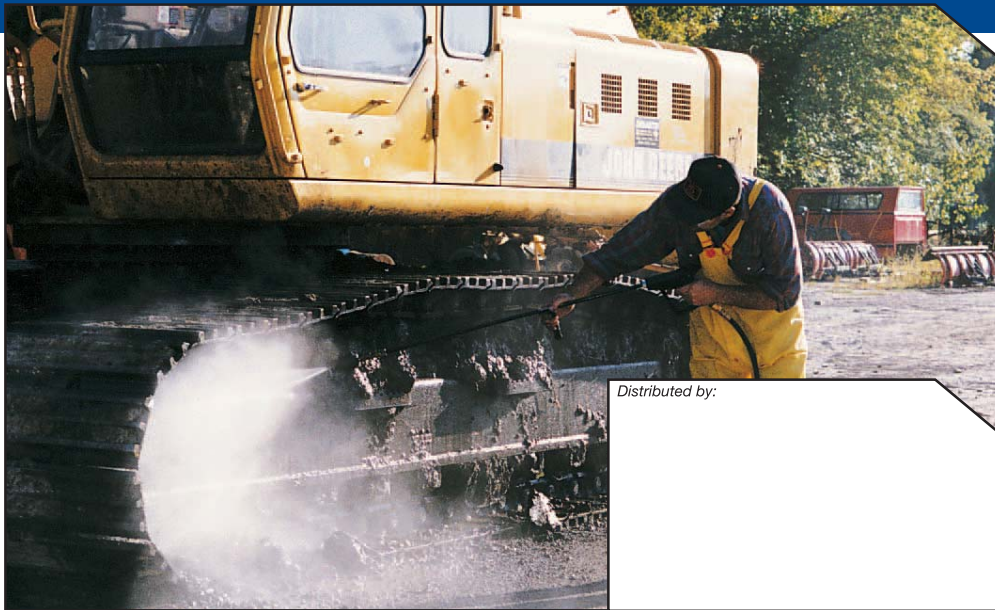

Distributed by:



Alklean Industries - 2111 Catalina - Pasadena, TX 77503 - (281)479-5966

HDD Series

GASOLINE/DIESEL - DIRECT DRIVE

STATIONARY - PORTABLE SKID MOUNT



Compact design, fits through a 30-inch doorway



12 Volt Burner with fuel/water separator



Convenient hose hanger and wand holder



HDB Series

STATIONARY - PORTABLE SKID MOUNT

GASOLINE/DIESEL - BELT DRIVE

Additional Features:

- ✓ Performance proven gasoline engine or Yanmar diesel engine
- ✓ Forged brass manifold
- ✓ General or AR pump
- ✓ Thermal relief valve
- ✓ Powder coated steel square tube skid frame
- ✓ Stainless-steel coil wrap heat exchanger with horizontal schedule 80 pipe coil
- ✓ No. 1 or No. 2 diesel or kerosene fired burner (Bio-fuel not approved at this time)
- ✓ Adjustable thermostat
- ✓ Quick connect nozzles (10, 15, 25 & 40-degrees)



Optional 3-way ball valve



Stainless steel control panel shown with optional steam, high pressure chemical and thermostat

